


24.09.03



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

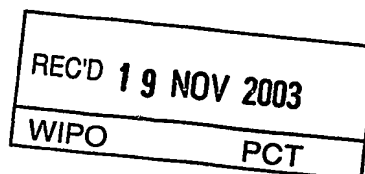

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02447182.3

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:  
Application no.: 02447182.3  
Demande no:

Anmeldetag:  
Date of filing: 25.09.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Thomson Multimedia Broadband Belgium  
Prins Boudewijnlaan 47  
2650 Edegem  
BELGIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Method for routing data packets, and devices for implementing the method

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H04L12/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

## **Method for routing data packets, and devices for implementing the method**

5           The invention concerns a method for routing data frames, for example Ethernet frames, in an Ethernet routing device. The invention applies to DSL modems, but is not limited to that environment.

10           IP multicasting is the transmission of an IP datagram to a group of devices identified by a single IP destination address. A device connected to a LAN (Local Area Network), for example an Ethernet LAN, may join or leave a group, i.e. request that multicast packets concerning a certain group be addressed to it or not. The Internet Group Management Protocol ('IGMP') provides a way for a device to report its multicast group membership to adjacent  
15 routers.

          The LAN can be connected to a WAN (Wide Area Network) through a routing device. This routing device, which may be an ADSL modem, has to learn which packets received on the WAN are to be forwarded on the LAN in the context of multicast groups. For this purpose, it can monitor IGMP packets sent from the devices on the LAN to the WAN routers. This process, called  
20 'snooping', allows the routing device to update its internal tables for the purpose of filtering packets from the WAN.

          The number of IGMP packets may be fairly important. If a switch module connected to the LAN communicates IGMP packets to the multicast management control module of the routing device through control busses, the bandwidth limitations might be too important. On the other hand, the processing of frames – IGMP or not – should not be made more complex simply because of  
25 any special treatment of the IGMP frames.

30           The invention concerns a method for routing data packets in a routing device connecting a first network and a second network, characterized by the steps of:

- (a) receiving a frame from a device connected to the first network;
- (b) forwarding the frame to an internal bridge module of the device;
- 35 (c) checking whether the frame contains a multicast group management message and in the affirmative, creating a new frame comprising as destination address the destination address of an internal multicast group

management module and as payload at least the multicast management data of the received frame; and

(d) forwarding this new frame to the internal bridge function.

5 By creating a new frame and sending it through the internal bridge module in the same fashion as the received frames, there is no need to use any low bit-rate control bus: the normal data bus may be used. The internal bridge module does not have to carry out any specific processing either for delivering the information to the right module. All packets, whether concerning multicast  
10 group management messages or not, are handled alike by the internal bridge function.

According to an embodiment of the invention, the first network is an Ethernet network and the steps (a) to (d) are carried out by an Ethernet switch  
15 module.

According to an embodiment of the invention, the method further comprises the step of inserting into the new frame an identifier of a port on which the initial frame was received.  
20

According to an embodiment of the invention, the multicast group management message is an IGMP message.

Another object of the invention is a routing device for connecting a first and a second network, characterized in that it comprises:  
25

(a) a switch for receiving frames from the first network;

(b) an internal bridge function for forwarding frames to appropriate modules, said bridge function being connected to the switch;

(c) a multicast group management module for maintaining up to date  
30 multicast group information based on frames received on the first network, said multicast group management module being connected to the bridge function for receiving selected frames there from;

wherein the switch is adapted to determine whether a received frame comprises a multicast group management message, and in the affirmative,  
35 providing a new frame comprising multicast group management information extracted from the original frame, wherein the second frame has a destination

address equal to the address of the multicast group management module, and for delivering the new frame to the bridge function.

5 Another object of the invention is a switch circuit for use in a device as defined above, said circuit comprising multiple input ports, characterized in that it is adapted to determine whether a received frame comprises a multicast group management message, and in the affirmative, providing a new frame comprising multicast group management information extracted from the original frame, wherein the second frame has a destination address equal to the  
10 address of the multicast group management module, and for forwarding the new frame to the bridge function.

Other characteristics and advantages of the invention will appear in the description of the non-restricting embodiment, explained with the help of the  
15 enclosed figures, among which:

- figure 1 is a block diagram of the device according to the present embodiment;
- figure 2 is a diagram of an Ethernet frame according to the present embodiment;
- 20 - figure 3 is a flowchart of the method according to the present embodiment.

More information about multicasting can be found in the documents 'IETF RFC 1112' and 'IETF RFC 2236' (Internet Engineering Task Force  
25 Request for Comments).

Figure 1 is a schematic block diagram of a modem 1 connecting a Local Area Network (LAN) and a Wide Area Network (WAN).

The DSL modem comprises an Ethernet circuit 2 and an integrated  
30 chipset 3. The Ethernet switch 2 handles the Local Area Network (LAN) traffic received/sent through its ports. In the present embodiment, the LAN is an Ethernet network. The integrated chipset 3 contains multiple blocks: a bridge circuit 4 able to bridge incoming traffic to all bridge interfaces of the modem (namely here, ATM PVCs – for Asynchronous Transfer Mode Permanent Virtual  
35 Circuits – used in a 'bridged' mode), a 'packets and cells' engine 5 responsible for ATM and DSL encapsulation, transmission and reception and a CPU 6 that

runs software for specific processing needs. The Ethernet switch 2 and the IC 3 are connected through a data bus 7 and a management and control bus 8.

The Ethernet switch receives Ethernet frames from the devices connected to its ports, e.g. device 9, which is for example a personal computer.

5 Frames received by the switch are forwarded to the IC 3 through the data bus 7.

According to the present embodiment, the Ethernet switch detects IGMP IP frames in the Ethernet frames transmitted by devices (not shown) on the LAN. IGMP frames are IP datagrams which IP protocol number is '2' (IGMP). When such a frame is detected, the Ethernet switch delivers the  
10 original frame to the IC 3, the Ethernet layer being removed in the CPU, when a packet is handled by the latter (and also on the destination device in the WAN). It further creates a new frame, incorporating the detected frame, as well as additional information. According to the present embodiment, this additional information is the port number of the switch on which the IGMP frame has been  
15 received. The switch transmits both the additional port information as well as the IGMP frame to the CPU 6, through the data bus. For this purpose, the switch creates a new Ethernet frame, having a destination address equal to that of the CPU 3, and containing in its payload the port information, e.g. port number, and the IGMP Ethernet frame. An example of such a frame is shown in  
20 figure 2. The frame is identified as being a forwarded IGMP packet with port information by a specific Type value.

The bridge circuit receives this frame, and given the destination address, transmits it to the CPU. It does not deliver this frame on the WAN. The CPU detects the presence of the port number and IGMP frame in the payload. It  
25 then uses the contents of the IGMP frame, in particular the multicast destination address, to update its multicast group information for the devices on the LAN.

If the message is a 'join group' message and the group already exists, the port number of the incoming frame is added to the group members. The information is thus transmitted to the switch, which is a managed switch  
30 having a feature that allows grouping of ports. Sending to the group is then equivalent to sending to each port being part of that group.

If the message is a 'join group' message and the group does not yet exist, it is created, and the port number of the incoming frame is added as a first group member.

35 If the message is a 'leave group' message, the source address is removed from the group.

The multicast information is maintained in a memory (not illustrated) by the CPU, under the form of appropriate tables.

The above process is illustrated by the flowchart of figure 3.

5

The CPU filters IP frames having as destination address one of the multicast addresses of the groups of which devices on the LAN are members, and to transmit filtered frames on the network to the appropriate ports. The packet/cell engine 5 transmits and receives packets respectively to and from the DSL line.

10

Although the embodiment of the invention concerns an Ethernet and IP environment, the invention is not limited to this particular case. Moreover, other messages than IGMP messages may be processed in a similar way, and any other multicast management protocol can be used. The invention can be used in other environments when a packet of data needs to be forwarded to one or more modules or processes, depending on packet content, without blocking the default path of the packet.

15

20

### Claims

1. Method for routing data packets in a routing device (1) connecting  
5 a first network and a second network, characterized by the steps of:

(a) receiving a frame from a device (9) connected to the first network;

(b) forwarding the frame to an internal bridge module (4) of the  
device;

(c) checking whether the frame contains a multicast group  
10 management message and in the affirmative, creating a new frame comprising  
as destination address the destination address of an internal multicast group  
management module (6) and as payload at least the multicast management  
data of the received frame; and

(d) forwarding this new frame to the internal bridge function (4).  
15

2. Method according to claim 1, wherein the first network is an  
Ethernet network and wherein the steps (a) to (d) are carried out by an Ethernet  
switch module.

20 3. Method according to claim 1 or 2, further comprising the step of  
inserting into the new frame an identifier of a port on which the initial frame was  
received.

4. Method according to one of the claims 1 to 3, wherein the  
multicast group management message is an IGMP message.  
25

5. Method according to one of the claims 1 to 4, further comprising  
the step, by the multicast group management module upon reception of the new  
frame, of updating its multicast group information.

30 6. Routing device (1) for connecting a first and a second network,  
characterized in that it comprises:

(a) a switch (2) for receiving frames from the first network;

(b) an internal bridge function (4) for delivering frames to appropriate  
modules, said bridge function being connected to the switch (2);

35 (c) a multicast group management module (6) for maintaining up to  
date multicast group information based on frames received on the first network,



said multicast group management module being connected to the bridge function for receiving selected frames there from;

5 wherein the switch is adapted to determine whether a received frame comprises a multicast group management message, and in the affirmative, providing a new frame comprising multicast group management information extracted from the original frame, wherein the second frame has a destination address equal to the address of the multicast group management module, and for forwarding the new frame to the bridge function.

10 7. Routing device according to claim 6, wherein the switch is an Ethernet switch.

15 8. Routing device according to claims 6 or 7, wherein the switch comprises a plurality of ports for receiving frames, and wherein the switch is further adapted to include into the new frame a port identifier of the port on which the initial frame containing the multicast group management message arrived.

20 9. Routing device according to one of the claims 6 to 8, wherein the multicast group management message is an IGMP message.

25 10. Switch circuit for use in a device according to claim 6, said circuit comprising multiple input ports, characterized in that it is adapted to determine whether a received frame comprises a multicast group management message, and in the affirmative, providing a new frame comprising multicast group management information extracted from the original frame, wherein the second frame has a destination address equal to the address of the multicast group management module, and for forwarding the new frame to the bridge function.

**ABSTRACT**

5           The present invention is related to a method for routing data packets in a routing device (1) connecting a first network and a second network, and to a corresponding routing device.

10           The method comprises the steps of receiving a frame from a device (9) connected to the first network; forwarding the frame to an internal bridge module (4) of the device; checking whether the frame contains a multicast group management message and in the affirmative, creating a new frame comprising as destination address the destination address of an internal  
15           multicast group management module (6) and as payload at least the multicast management data of the received frame; and forwarding this new frame to the internal bridge function.

FIG. 1

20

1 / 3

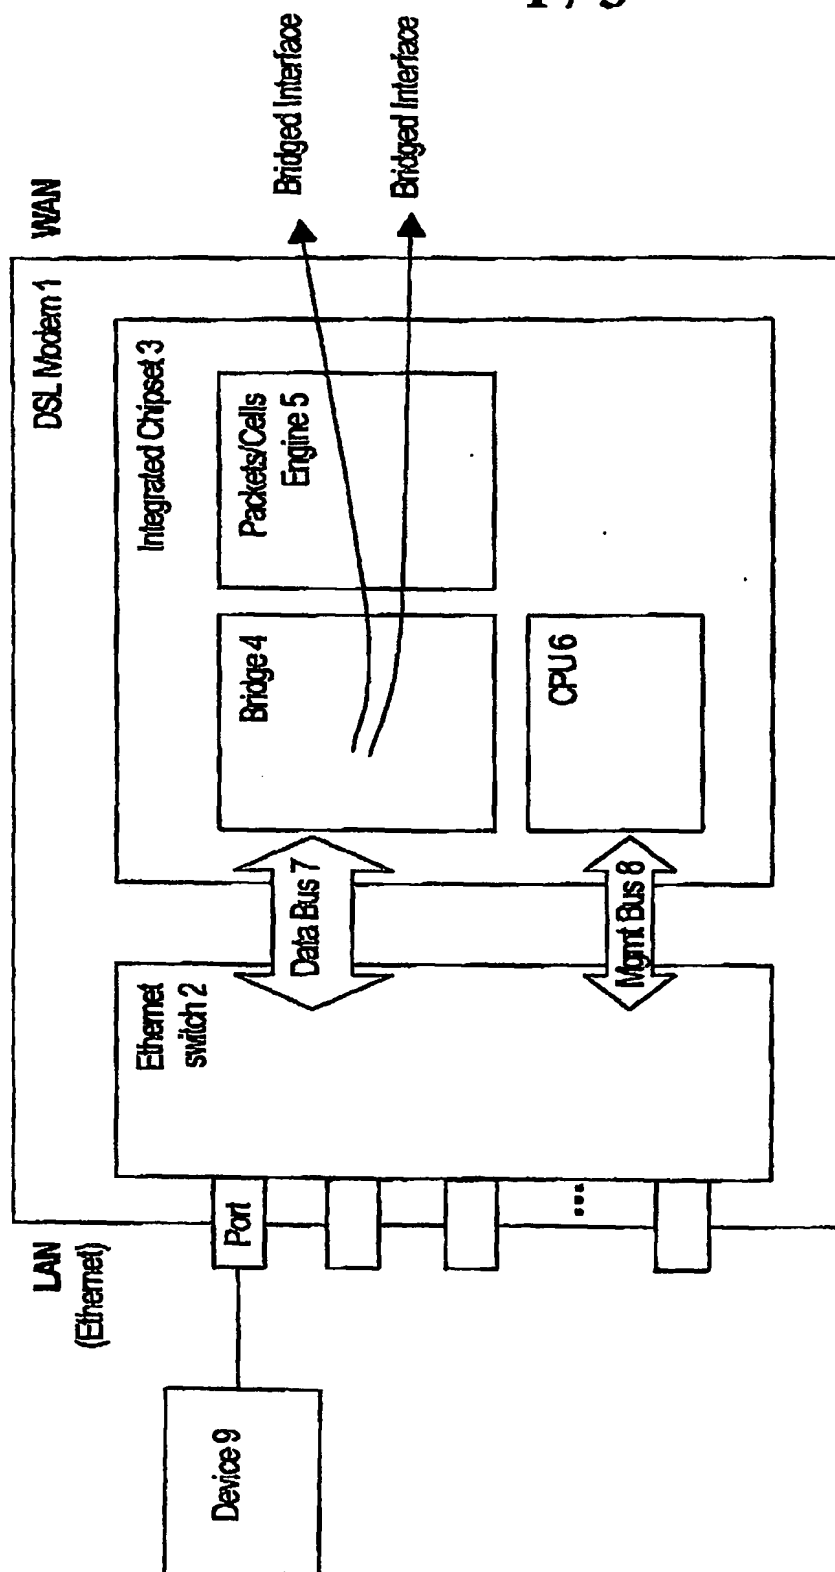


Fig. 1

2 / 3

CPU MAC Address	Source MAC Address (6-bytes)	Length/Type (2-bytes)	Port Identifier	IGMP Frame	Pad (0-p-bytes)	Frame Check Sequence (4-bytes)
-----------------------	---------------------------------------	--------------------------	-----------------	------------	--------------------	---



MAC Client Data

Fig. 2

3 / 3

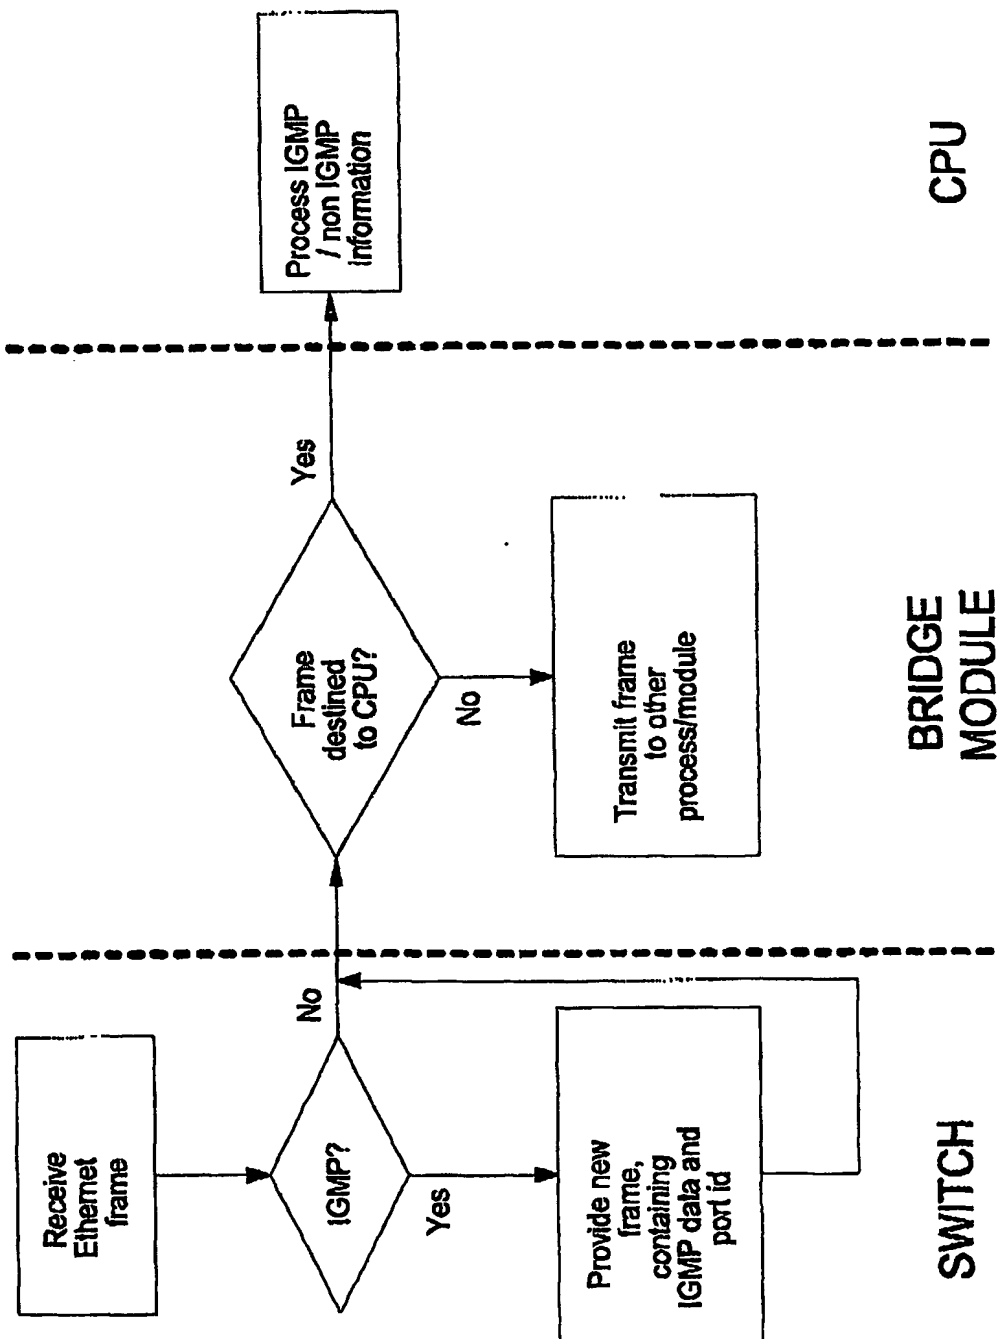


Fig. 3